


Sight Glass for Boiler and Incinerator

Model: KSG8

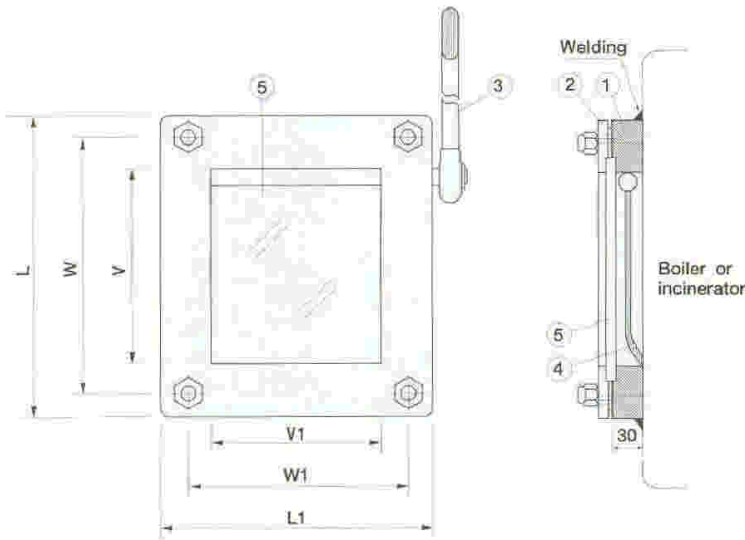

Dimensions

Size	L	L1	W	W1	V	V1
S-type	220	200	180	160	120	100
L-type	270	250	230	210	170	150

1. Body
2. Cover
3. Lever
4. Damper
5. Glass

Working Temperature: 1000°C

Working Pressure: 5 bar

Glass: Fused Silica

Sight Glass for flame checking

Sight Glass Characteristics



Glass Name	Temperature (°C)		Thermal Shock Resistance (°C)	Thickness (mm)
	Operate	Destruct		
Tempered	120	380	50	3.0 – 24.0
Pyrex	230	490	300	3.0 – 30.0
Borosilicate	450	500	460	3.0 – 30.0
Pyroceram	700	800	800	3.0 – 50.0
Vycor	900	1200	980	3.0 – 50.0
Fused Silica	1000	1300	1100	3.0 – 100.0

C & F T Flowmeters & Chlorinators
TECHNOLOGIES

Specialists in flow metering and chlorination applications
 Phone: +27 11 792 4588 Fax: +27 11 792 8494
 email: sales@cftechflowmeters.co.za
 website: www.cftechflowmeters.co.za