


Lantern Type Sight Flow

■ Model: KSG4

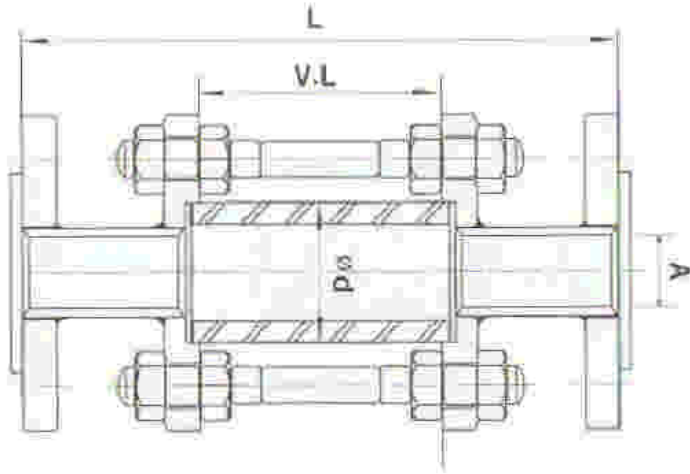

■ SPECIFICATION

Connections: Flanged to DIN or ANSI spec

Max. Pressure: 0 – 5.0 bar

Max. Temperature: 100°C

Glass: Tempered Glass

Lantern glass is used for low pressure and can check the state of fluid flow from any direction.


■ DIMENSIONS

Size A(")	L	V.L.
15(1/2)	220	75
20(3/4)	220	75
25(1)	220	75
32(1-1/4)	220	75
40(1-1/2)	220	75
50(2)	240	75
65(2-1/2)	240	75
80(3)	240	75
100(4)	260	75
125(5)	280	75
150(6)	280	75
200(8)	280	75

■ Materials

Body
SS41(Steel Plate)
SUS304(Stainless Steel Plate)
SUS316(Stainless Steel Plate)

■ Model : KSG4-1

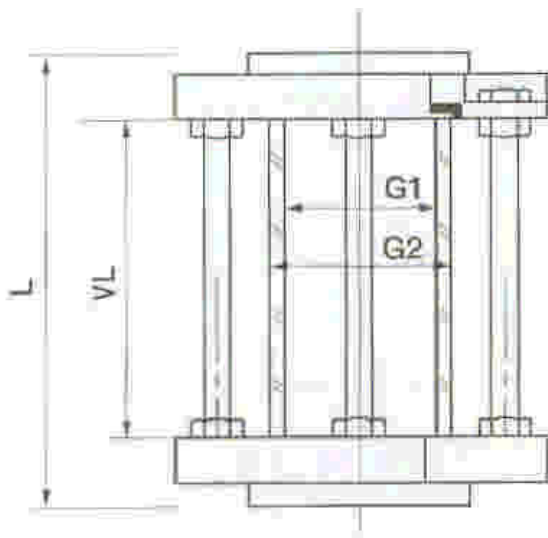

■ DIMENSION

Size A(")	L	V.L.	G1	G2
25(1)	250	204	30	46
40(1-1/2)	250	200	50	70
50(2)	250	200	60	80
65(2-1/2)	250	200	75	95
80(3)	250	200	90	110
100(4)	150	100	110	130
125(5)	150	100	135	155
150(6)	150	98	160	180
200(8)	150	98	210	230

C & F T Flowmeters & Chlorinators
TECHNOLOGIES

Specialists in flow metering and chlorination applications
Phone: +27 11 792 4588 Fax: +27 11 792 8494
email: sales@cftechflowmeters.co.za
website: www.cftechflowmeters.co.za